

PRODUCT CATALOG



PREMIUM CAULKS AND SEALANTS



White Lightning®, the choice of building industry professionals and DIYers for nearly a century, has updated its packaging.

Our new cartridges make it easier to identify and choose the right product for your project. From all-purpose caulks and sealants, to those designed specifically for windows and doors or kitchens and baths, White Lightning has the right sealant for your project.

Contents

ALL-PURPOSE

4-6

Superior flexibility and colors for a variety of interior and exterior projects.

KITCHEN | BATH

8

Withstands humidity and surface water. Excellent adhesion to marble, glass, metal and more!

WINDOW | DOOR

9

Provides durability and flexibility to withstand harsh weather and temperature extremes.

SPECIALTY

10-14

Sealants for concrete, mortar, roof, gutter, weatherproofing, smoke and fire blocking.

PATCH & REPAIR

15-16

Formulated for smooth and easy application, long-lasting durability and top performance.



We Have a Caulk for That

- Silky-Smooth Texture**
 Finishes easily for a smooth, professional finish.
- Smooth Application**
 Special filling process removes air in cartridge, eliminating gaps, skips and bubbles.
- Non-Slump Formula**
 Extra-firm consistency and outstanding adhesion; won't run or sag before tooling.
- Paintable**
 Most caulks and sealants can be finished with quality paints (check individual products for paintable icon).
- Non-Yellowing**
 Formulas contain UV stabilizers to prevent fading and yellowing.
- Time-Saving**
 Premium product performance and smooth, even application prevent the need for rework.
- Easy Water Cleanup**
 Water-soluble latex formulas clean up easily with water.

STANDARD ATTRIBUTE ICONS:



The White Lightning® brand team has gained a clear understanding of what our customers are looking for when they shop for caulks and sealants. These findings have been the inspiration for the updates to the White Lightning brand and packaging.

Consumers equate price with quality and value of a product, but sometimes that doesn't easily translate when comparing cartridges side by side. Beyond warranty, we chose to use colors and key selling features to differentiate the good, better and best products.

White Lightning has also introduced bilingual text on the new packaging. The new labels accommodate the expanding consumer base by featuring English on one side and Spanish on the other, while staying true to the easy-to-read packaging architecture.



Scan QR Code found on the side of the label for more product details.



- Color
- Brand
- Product Name
- Key Selling Features
- Formula Description
- Premium Attribute Icons (EMR, UL, FBC, etc.)
- Warranty Icon
- Standard Attribute Icons
- QR Code
- ASTM Spec

Other side of label.

Not all product images in the catalog will reflect new design.

Meets or exceeds the Federal Specifications of TT-S-001543A Class A (Com-NBS), TT-S-00230C Class A (Com-NBS). Exceeds performance requirements of ASTM C-920 Type S, Grade NS, Class 25 and CAN 2-19, 13-M82.



White Lightning® All Purpose caulks and sealants provide flexibility and elasticity for a variety of interior and exterior uses. The silicone and latex formulations provide superior performance on a wide range of surfaces.

SILICONE ULTRA ALL PURPOSE SEALANT



This 100% silicone product is the perfect choice for many interior applications. Its durability, UV resistance and superior expansion and contraction capabilities also make it an excellent choice for exterior jobs. It is commonly applied at windows, doors, trim and in many other general purpose applications.

For use on: ceramic tile, wood, glass, fiberglass, vinyl, metal and most plastics

- Water/weathertight seal
- Permanently flexible
- Non-shrinking, non-yellowing formula

Meets or exceeds the Federal Specifications of TT-S-001543A Class A (Com-NBS), TT-S-00230C Class A (COM-NBS). Exceeds performance requirements of ASTM C-920 Type S, Grade NS, Class 25 and CAN 2-19, 13-M82.



PRODUCT	COLOR	SIZE
W11111010	Clear	10.0 fl.oz.
W11110010	White	10.0 fl.oz.



3006 ULTRA® ALL PURPOSE ELASTOMERIC SEALANT



3006 Ultra is a premium sealant featuring outstanding flexibility and adhesion to most surfaces. An excellent choice for any caulking project, it is ideal for filling joints where high levels of movement are expected. Commonly applied at windows, doors, trim, siding, tubs, showers, sinks, toilets, splashboards, countertops and other high-movement joints.

For use on: drywall, wood, glass, vinyl, masonry, concrete, stucco, metal, porcelain and many plastics

- 40% more flexible than standard latex caulks
- Dries non-tacky – limits dirt pickup
- Bright white finish
- Paintable
- Water cleanup
- Interior/exterior use



Exceeds performance requirements of Federal Specification TT-S 00230C Type II, Class A and meets performance requirements of ASTM C-920, Class 35.

Tested at Riverbank Acoustical Laboratories in accordance with ASTM E-90 and C-919, this product was sound tested and proven to be an integral component in maintaining STC/MTC partition ratings. It has also been tested in accordance with ASTM C- Stet and D-217.

PRODUCT	COLOR	SIZE
W11000010	White	10.0 fl.oz.
W11000005	White	5.5 fl.oz.
W11001010	Clear	10.0 fl.oz.
W11001005	Clear	5.5 fl.oz.
W11004010	Gray	10.0 fl.oz.
W11005010	Black	10.0 fl.oz.
W11002010	Almond	10.0 fl.oz.
W11006010	Cedar	10.0 fl.oz.

SILICONE RUBBER ALL PURPOSE SEALANT



This highly flexible, non-shrinking 100% silicone sealant features outstanding protection against water and weather damage. Its excellent durability and flexibility make it the perfect sealant for areas exposed to heavy wear and harsh elements. Commonly applied at windows, doors, trim, siding and in many other general purpose applications.

For use on: ceramic tile, porcelain, vinyl, wood and glass

- Highly flexible, watertight seal
- Non-shrinking
- Resists moisture and mildew
- RTV formula
- Excellent adhesion*
- Interior/exterior use

Meets or exceeds Federal Specifications of TT-S-001543A Class A (COM-NBS) for silicone building sealants, TT-S-00230C Class A (COM-NBS) for one-component sealants. Exceeds performance requirements of ASTM C-920, Class 25.

NSF – Meets NSF / ANSI Standard 51 - Food Equipment Materials.
USDA – Meets the requirements of USDA regulations for use in federally inspected meat and poultry plants.
FDA – Meets the requirements of the FDA regulation (Code of Federal Regulations 21 CFR) concerning food contact applications if used in accordance with: 21 CFR Section 177.2600: "Rubber articles intended for repeated use"

PRODUCT	COLOR	SIZE
W11121010	Clear	10.0 fl.oz.
W11121005	Clear	3.0 fl.oz.
W11120010	White	10.0 fl.oz.
W11124510	Aluminum	10.0 fl.oz.
W11125010	Black	10.0 fl.oz.
W11127010	High Heat Red	10.0 fl.oz.

*Not for use on porous natural materials such as granite, marble, masonry and some metals. Curing process can cause lack of adhesion and may harm these materials. For best results on these surfaces, use Silicone Ultra All Purpose Sealant.



3006 QUICK DRY™ SILICONIZED ACRYLIC LATEX CAULK



White Lightning 3006 Quick Dry can be painted in 20 minutes with a brush and is paintable immediately with an airless sprayer! The full-bodied formula is ideal for filling joints and openings around doors, windows, baseboards, trim, siding and vents.

For use on: wood, drywall, metal, glass and masonry

- Paintable in 20 minutes with brush
- Paintable immediately with airless sprayer
- Good flexibility, crack resistant
- Cured caulk is mold and mildew resistant

Exceeds performance requirements of ASTM C-834.



PRODUCT	COLOR	SIZE
W12QD0010	White	10.0 fl.oz.



3006™ ALL PURPOSE ADHESIVE CAULK



White Lightning 3006 is a silicized acrylic latex caulk perfect for most general purpose jobs. It has been a professional favorite for years. 3006 is available in a variety of colors, including white and clear.

For use on: wood, drywall, metal, glass, vinyl, masonry and most plastics

- Smooth, professional application
- Excellent flexibility and elasticity
- Cured caulk is mold and mildew resistant
- Excellent color retention

Exceeds performance requirements of ASTM C-834.



PRODUCT	COLOR	SIZE
W12AF0010	White	10.0 fl.oz.
W12AF0005	White	5.5 fl.oz.
W12001010	Clear	10.0 fl.oz.
W12001005	Clear	5.5 fl.oz.
W12002010	Almond	10.0 fl.oz.
W12003010	Brown	10.0 fl.oz.
W12004010	Gray	10.0 fl.oz.

ALL PURPOSE

ALL PURPOSE



ALL PURPOSE



PAINTER'S PREFERRED® ACRYLIC LATEX CAULK

Painter's Preferred is an economical general purpose product suitable for sealing multiple interior/exterior cracks and joints. Ideal for use on doors, windows and trim.

For use on: wood and glass

- Paintable
- Water cleanup
- Interior/exterior use

Meets ASTM Specification C-834, Grade NF.



PRODUCT	COLOR	SIZE
W13000010	White	10.0 fl.oz.



PROMAX 300 RCS-4® ACRYLIC URETHANE ELASTOMERIC SEALANT

PREMIUM LIFETIME

This heavy-duty premium elastomeric sealant is professional grade and formulated for outstanding performance on most general purpose caulking jobs. Its extremely thick and smooth consistency is favored among professionals.

For use on: wood, metal, concrete, brick, plaster, masonry, drywall and tile

- Excellent durability
- Outstanding adhesion
- Heavy-bodied formulation
- Silky smooth texture
- Interior/exterior use
- Paintable

Meets or exceeds ASTM C-920, Grade NS, Class 25 (Class A).



PRODUCT	COLOR	SIZE
W60300010	White	10.0 fl.oz.
W60302010	Almond	10.0 fl.oz.
W60303510	Bronze	10.0 fl.oz.

EL SELLADOR SILICONIZED ACRYLIC LATEX ADHESIVE CAULK

STANDARD 40 YEAR

El Sellador, "The Sealer", is a quality caulk suitable for many general purpose jobs, including windows, doors, trim and other molding. The cartridge and carton feature completely dual language (English/Spanish) packaging.

For use on: wood, drywall, metal and glass

- Great adhesion and flexibility
- Water cleanup
- Interior/exterior use

Meets the performance requirements of ASTM C-834.



PRODUCT	COLOR	SIZE
WL0004002	White	10.0 fl.oz.

HOW MUCH CAN I CAULK?


When using the reference chart below, be sure to consider the physical limitations of the product you are using. Not all products can be used in the gap sizes shown.

COVERAGE IN LINEAR FEET

ONE CARTRIDGE (10.0 FL. OZ.)

WIDTH IN INCHES	DEPTH IN INCHES			
	1/8"	1/4"	3/8"	1/2"
1/8"	99			
1/4"	49	24		
3/8"	33	20	11	
1/2"	24	12	8	6
5/8"	20	10	7	5
3/4"	16	8	6	4
7/8"	14	7	5	4
1"	12	6	4	3

Go to WLCaulk.com for interactive infographic product selector guide.

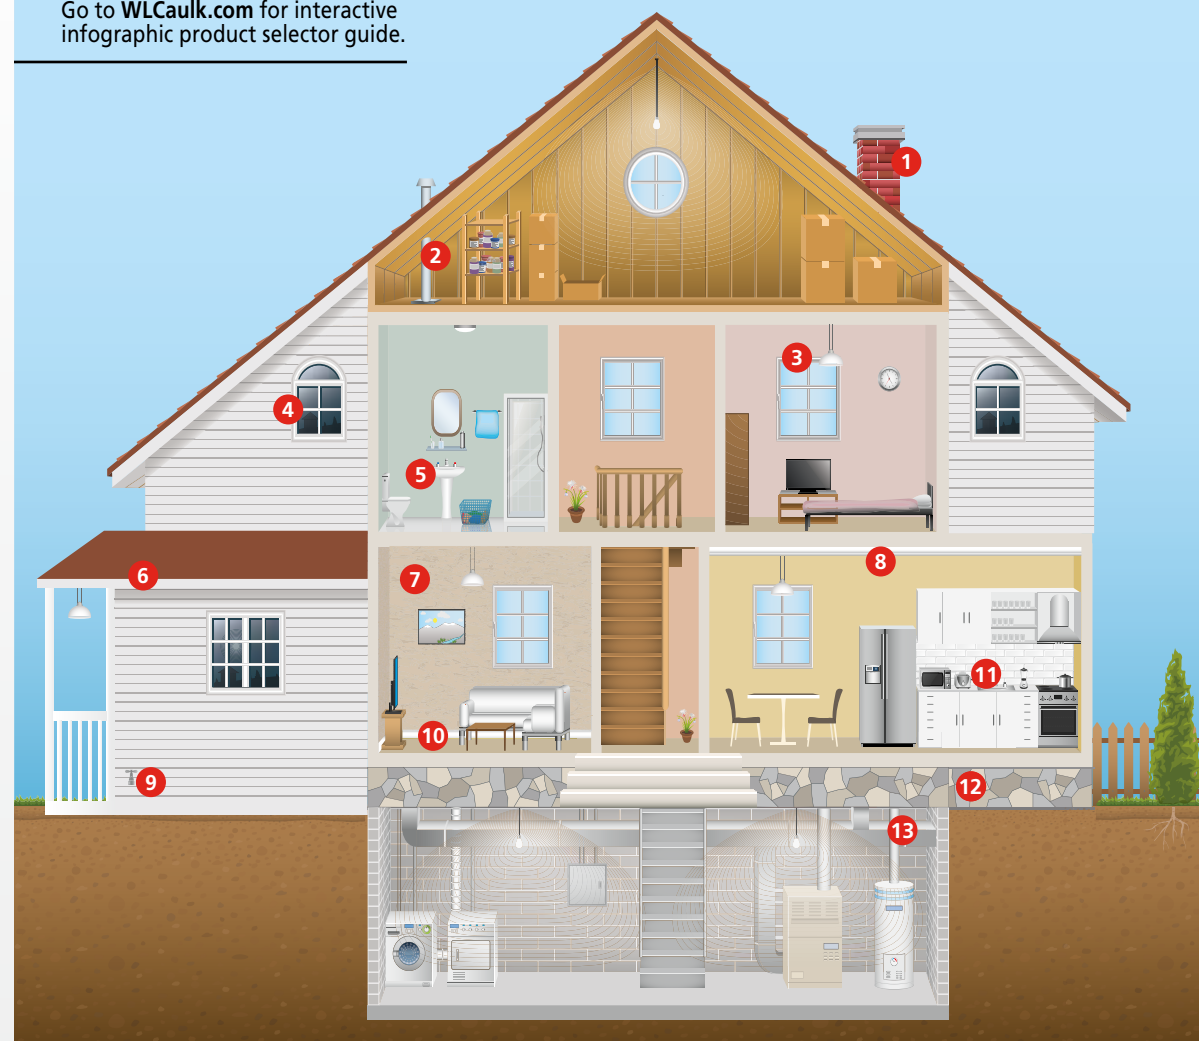

- POLYURETHANE**
Construction sealant
- STOP GAP!**
Minimal & triple expanding insulating foam
- SEASONSeal**
Removable weather stripping
- SILICONE ULTRA**
Window & door sealant
- SILICONE ULTRA**
Kitchen & bath sealant
- STORM BLASTER®**
All-weather construction sealant
- ORANGE PEEL**
Knockdown wall texture
- 3006 ULTRA®**
All-purpose elastomeric sealant
- SILICONE ULTRA**
All-purpose sealant
- 3006 QUICK DRY™**
Siliconized acrylic latex caulk
- SILICONE ULTRA**
Kitchen & bath sealant
- POLYURETHANE**
Construction sealant
- FLAME BUSTER®**
High heat fire- and smoke-blocking latex caulk



The GREENGUARD indoor air quality certification program provides assurance that products designed for indoor environments meet strict chemical emissions limits (tested by independent labs) and will contribute to healthier indoor air quality. The **GREENGUARD GOLD** certification includes health-based criteria for additional chemicals and also *requires lower total VOC emissions levels* to ensure that products are acceptable for use in schools and health care facilities.

The following White Lightning® products have GREENGUARD GOLD certification:

- | | |
|---|---|
| All Purpose Silicone Rubber | Pristine® Premium Acrylic Sealant |
| All Purpose 3006 Ultra | Speed Grip® Construction Adhesive |
| All Purpose 3006 Quick Dry | Flame Buster® High Heat Latex Caulk |
| All Purpose 3006™ Advanced/Original Formula | Flame Buster Silicone Sealant |
| Kitchen & Bath Silicone Ultra | Flame Buster Intumescent Silicone Sealant |
| Optima Premium Hybrid Sealant | Flame Buster Intumescent Latex Caulk |

GREENGUARD GOLD certified products must also comply with requirements of the State of California's Department of Public Health (CDPH) "Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.2 (2017)" (also known as California Section 01350).



White Lightning® Kitchen & Bath high-performance products that stand up to high humidity, surface water and a variety of natural materials, including granite, marble, ceramics and wood.

White Lightning® Window & Door is specially formulated to provide adhesion and flexibility to withstand both harsh weather and fluctuating temperatures.



SILICONE ULTRA KITCHEN & BATH SEALANT

This permanently flexible formulation is used to seal cracks or joints in many kitchen and bath applications. 100% silicone is extremely durable and will protect from damage caused by heat and water. It will not shrink or crack. Commonly applied at bathtubs, basins, sinks, showers, toilets, countertops, splashboards and ceramic tile.

For use on: ceramic tile, marble, granite, porcelain, vinyl, wood, metal and glass

- Will not shrink or crack
- Permanently flexible, watertight seal
- Cured sealant is mold and mildew resistant
- Interior/exterior use

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) for silicone building sealants and TT-S-00230C Class A (COM-NBS) for one-component sealants, ASTM C-920, Class 25.



PRODUCT	COLOR	SIZE
W21100010	White	10.0 fl.oz.
W21100005	White	5.3 fl.oz.
W21101010	Clear	10.0 fl.oz.
W21101005	Clear	5.3 fl.oz.
W21102010	Almond	10.0 fl.oz.



LATEX ULTRA PREMIUM HIGH-GLOSS SEALANT

This high-performance product is formulated to seal and waterproof joints and seams. This unique formula delivers a high-gloss finish similar to silicone. Commonly applied at bathtubs, basins, sinks, showers, toilets, countertops and splashboards.

For use on: ceramic tile, marble, granite, porcelain, vinyl, wood, metal and glass

- High-gloss finish
- Water cleanup
- Cured sealant is mold and mildew resistant
- Interior/exterior use



PRODUCT	COLOR	SIZE
W21000010	White	10.0 fl.oz.
W21000005	White	5.3 fl.oz.
W21001010	Clear	10.0 fl.oz.



SILICONE ULTRA WINDOW & DOOR SEALANT

Silicone Ultra Window & Door is an excellent choice for many interior and exterior projects. It provides excellent adhesion and flexibility as well as resistance against harsh weather elements. Commonly applied at windows, doors, vinyl siding, trim, etc.

For use on: wood, glass, fiberglass, metal, vinyl, masonry, stucco, plaster and many plastics

- Will not shrink or crack
- Permanently flexible
- Water/weathertight seal
- Cured caulk is mold and mildew resistant
- Interior/exterior use
- Excellent adhesion

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) for silicone building sealants and TT-S-00230C Class A (COM-NBS) for one-component sealants, ASTM C-920, Class 25.



PRODUCT	COLOR	SIZE
W31100010	White	10.0 fl.oz.
W31101010	Clear	10.0 fl.oz.
W31104510	Aluminum	10.0 fl.oz.
W31103510	Bronze	10.0 fl.oz.



SILICONE RUBBER WINDOW & DOOR SEALANT

This highly flexible, minimally shrinking sealant provides a watertight seal around windows, doors and trim. The 100% silicone formulation offers outstanding protection against weather damage. It is especially effective in areas subject to heavy wear. Commonly applied at windows, doors, trim and siding.

For use on: wood, glass, fiberglass, some metals, vinyl, plaster and some plastics

- Highly flexible, watertight seal
- Minimal shrinking
- Cured caulk is mold and mildew resistant
- Protects against heat and water damage
- Excellent adhesion*
- Interior/exterior use

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) for silicone building sealants and TT-S-00230C Class A (COM-NBS) for one-component sealants, ASTM C-920, Class 25.

NSF – Meets NSF / ANSI Standard 51 - Food Equipment Materials. USDA – Meets the requirements of USDA regulations for use in federally inspected meat and poultry plants. FDA – Meets the requirements of the FDA regulation (Code of Federal Regulations 21 CFR) concerning food contact applications if used in accordance with: 21 CFR Section 177.2600: "Rubber articles intended for repeated use".



PRODUCT	COLOR	SIZE
W31110010	White	10.0 fl.oz.
W31111010	Clear	10.0 fl.oz.

*Not for use on porous natural materials such as granite, marble and masonry. Curing process can cause lack of adhesion and may harm these materials. For best results on these surfaces, use Silicone Ultra Window & Door Sealant.



TUB & TILE SILICONIZED ACRYLIC LATEX CAULK

This siliconized acrylic latex adhesive caulk offers watertight protection for sinks, showers and baths. The latex formula provides for easy application and easy water cleanup.

For use on: wood, glass, ceramic tile, marble and porcelain

- Cured caulk is mold and mildew resistant
- Dries tack free in minutes
- Durable scrubbing surface



PRODUCT	COLOR	SIZE
W22000010	White	10.0 fl.oz.
W22000005	White	5.3 fl.oz.

SILICONE SOLUTIONS:

By formulation, silicones stand up to extreme weather conditions and temperature variations. They are also extremely flexible. Silicone sealants adhere well to nonporous surfaces.

White Lightning Silicone Ultra products remain permanently flexible and will not shrink. Silicone rubber products exhibit many of the same characteristics, but have a stronger odor during cure and should not be used on naturally porous surfaces such as granite, limestone or masonry.



WEATHER SEAL SILICONIZED ACRYLIC LATEX CAULK

This siliconized acrylic latex adhesive caulk offers a weathertight/watertight seal for interior and exterior applications. The latex formula provides for easy application and easy water cleanup.

For use on: wood, vinyl, aluminum, plastic and metal

- Siliconized for extra adhesion
- Cured caulk is mold and mildew resistant
- Good flexibility and elasticity – no cracking

Meets performance requirements of ASTM C-834.



PRODUCT	COLOR	SIZE
W32000010	White	10.0 fl.oz.



GLAZING COMPOUND SILICONIZED ACRYLIC LATEX GLAZING COMPOUND

Window & Door Latex Glazing Compound is a siliconized vinyl co-polymer, blended from a unique combination of high quality pigments and resins that will not crack or yellow with age. It is specially formulated for sealing glass in wood, metal and aluminum window frames.

- Seals window panes in wood and metal frames
- Excellent adhesion and flexibility
- Interior/exterior use
- Paintable
- Water cleanup
- Watertight seal
- Will not crack or yellow with age



PRODUCT	COLOR	SIZE
WL08012	White	10.0 fl.oz.



OPTIMA PREMIUM HYBRID SEALANT

Optima is a premium hybrid sealant that has exceptional adhesion and flexibility upon curing. It is water ready/paintable in 30 minutes and has excellent weather and UV resistance. Optima can be applied in extreme temperature applications.

For use on: marble, wood, metal, concrete, aluminum, brick, plaster, glass, masonry, drywall, ceramic tile, various plastics, vinyl siding and most exterior substrates.

- Exceptional adhesion and flexibility
- Excellent weather and UV resistance
- Paintable in 30 minutes
- Water ready in 30 minutes
- Extreme temperature application
- Cured sealant is mold and mildew resistant

White: meets or exceeds performance requirements of ASTM C-920, Class 50.
Crystal Clear: meets or exceeds performance requirements of ASTM C-920, Class 25.



PRODUCT	COLOR	SIZE
W31200010	White	9.0 fl.oz.
W31201010	Crystal Clear	9.0 fl.oz.



PRISTINE® PREMIUM ACRYLIC SEALANT

Pristine is a premium acrylic sealant with a stay-clean formula that resists dirt and stains. It has excellent mold and mildew resistance upon curing. Pristine prevents flashing when painted after one hour.

For use on: wood, metal, concrete, brick, plaster, glass, masonry, drywall, ceramic tile and most exterior substrates.

- Stay-Clean Formula
- Resists dirt and stains
- Excellent mold and mildew resistance
- Prevents flashing when painted
- Paintable in 1 hour

Meets or exceeds performance requirements of ASTM C-920 class 25.



PRODUCT	COLOR	SIZE
W30000010	White	10.0 fl.oz.



BOLT® QUICK DRY SILICONIZED ACRYLIC LATEX CAULK

BOLT Quick Dry is a durable caulk that makes quick work of interior and exterior caulking projects. This quick dry formula can be painted within 30 minutes, keeping even the most time-sensitive projects on track. Ideal for filling joints and openings around doors, windows, baseboards, trim, siding and vents.

For use on: wood, drywall, metal, glass and masonry

- Paintable in 30 minutes
- Good flexibility and elasticity
- Maximum durability
- Will not yellow

Meets performance requirements of Federal Specification TT-S-00230C, Type II, Class B and meets performance requirements of ASTM C-920, Class 12.5.



PRODUCT	COLOR	SIZE
W31010010	White	10.0 fl.oz.



SPEED GRIP® CONSTRUCTION ADHESIVE

White Lightning Speed Grip Construction Adhesive provides instant grab on most porous and nonporous surfaces. It provides excellent adhesion and is ideal for interior application.

For use on: wood, concrete, brick, plasterboard, carpet, a variety of plastics and metal

- Instant grab on most porous and nonporous surfaces
- Provides high-strength bond
- Latex formula
- Water cleanup
- Paintable
- Ideal for interior applications



PRODUCT	COLOR	SIZE
W70100010	White	9.0 fl.oz.



PAINTABLE SILICONE ALL PURPOSE HYBRID SEALANT

Paintable Silicone is a high-performance hybrid sealant with EMR® technology that resists rain and water washout 3 hours after application. It is also paintable in 30 minutes. It features excellent adhesion and silicone-like performance, with the paintability of an acrylic latex sealant.

For use on: aluminum, glass, marble, wood, steel, trim, vinyl siding and various types of plastic

- Water ready after 3 hours
- Excellent adhesion and flexibility
- Weather and UV resistant
- Easy to apply for smooth finish
- Cured sealant is mold and mildew resistant

Meets or exceeds performance requirements of ASTM C-920, Class 35.



PRODUCT	COLOR	SIZE
W31202210	White	9.0 fl.oz.



MEGALASTIC® SUPER ELASTIC SEALANT

This premium sealant provides "stretchability" of over 700% and has outstanding flexibility and adhesion to most surfaces. Ideal for any caulking project, it is commonly applied to doors, windows, trim, crown molding and any joints where extreme movement can be expected.

For use on: drywall, wood, glass, masonry, concrete, metal, porcelain and plastic

- Water/weathertight seal
- Permanently flexible
- Non-shrinking, non-yellowing formula



PRODUCT	COLOR	SIZE
W13300010	White	10.0 fl.oz.



STORM BLASTER® ALL WEATHER CONSTRUCTION SEALANT

This super-elastomeric sealant is ideal for exterior use in extreme weather. It can be applied to cold or wet surfaces and still retain its excellent adhesion.

For use on: glass, wood, metal, paint, concrete, asphalt, brick, tile, fiberglass and most plastics

- Can be applied to wet and oily surfaces
- Excellent adhesion and permanently flexible
- Can be applied in temperatures ranging from 0 °F to 140 °F
- Exterior use

See video at WLCaulk.com



PRODUCT	COLOR	SIZE
W41401010	Crystal Clear	10.0 fl.oz.
W41401005	Crystal Clear	5.0 fl. oz.
W41000010	White	10.0 fl. oz.




SEASONSeal REMOVABLE WEATHER STRIPPING

SEASONSeal is a temporary sealant that provides a clear, weathertight seal around interior and exterior areas where drafts are a problem.

For use on: windows, doors or other exterior openings

- Removable after use
- Insulates against drafts and leaks
- Won't harm painted surfaces

See video at WLCaulk.com



PRODUCT	COLOR	SIZE
W41501010	Clear	10.0 fl.oz.



White Lightning® Specialty caulks and sealants provide superior performance for applications such as concrete or mortar repair, roof repair, gutter lap installation, smoke and fire blocking and weatherproofing.



SILICONE ULTRA GUTTER & FLASHING SEALANT

This 100% silicone, high-performance sealant features superior adhesion to many surfaces. It provides a weathertight seal that remains flexible and is tough enough to stand up to the elements. Ideal for sealing gutters, flashing, downspouts, lap joints, roof vents and siding.

For use on: aluminum/metal, wood, plastic, rubber, vinyl, concrete, mortar and stone

- Superior adhesion to metal, wood, masonry and vinyl
- Weatherproof and watertight seal
- Permanently flexible/non-shrinking

Meets or exceeds performance requirements of Federal Specification TT-S-001543A Class A (COM-NBS) and TT-S-00230C Class A (COM-NBS) ASTM C-920, Type 5, Grade NS, Class 25, 13-M82.



PRODUCT	COLOR	SIZE
W43101010	Clear	10.0 fl.oz.



BUTYL RUBBER CAULK

Butyl Rubber Caulk is a high-performance product that is ideal for sealing exterior gutters, corrugated roofing, pipes, aluminum and vinyl siding, lap joints, flashing, roof vents and drain spouts. Provides a watertight seal for areas exposed to the elements.

For use on: aluminum/metal, plastics, rubber, concrete, wood, vinyl, mortar and stone

- Remains flexible in temperature extremes
- Minimal shrinking
- Provides an insulating, watertight seal
- Exterior use

Meets performance requirements of Federal Specification TT-S-001657 and ASTM Specification C-1085.



PRODUCT	COLOR	SIZE
W43400010	White	10.0 fl.oz.

FLAME BUSTER® INTUMESCENT SILICONE SEALANT


This expanding, neutral cure intumescent sealant is designed to prevent the spread of fire, smoke and toxic gases. When exposed to temperatures above 300 °F, it expands to fill the voids left by collapsed materials.

For use on: PVC and other plastic through-penetrations


- Expands at temperatures over 300 °F
- Expands to 6 times original volume (at 662 °F)

Meets specifications ASTM E-814 (UL1479), ASTM E-84 (UL723), UBC 7-5, meets ASTM E-1966 (UL2079), meets ASTM C-920, Class 25.

PRODUCT	COLOR	SIZE
W44107010	Red	10.0 fl.oz.



FBC™ System Compatible indicates that this product has been tested and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® piping systems and products made with TempRite® Technology. The FBC System Compatible Logo, FBCTM, FlowGuard Gold®, BlazeMaster®, Corzan® and TempRite® are trademarks of Lubrizol Advanced Materials, Inc. or its affiliates.



FLAME BUSTER HIGH HEAT FIRE & SMOKE BLOCKING LATEX CAULK

This latex caulk is designed to resist high temperatures and smoke in non-rated construction.

For use on or around: wires, pipes, ducts and vents in wood- or steel-framed, non-rated construction

- Resists temperatures up to 1380 °F
- Blocks drafts, smoke and fire
- Easy application and cleanup

Meets ASTM E-136.



PRODUCT	COLOR	SIZE
W44017010	Red	10.0 fl.oz.



ASPHALT ROOF CEMENT SEALANT

Asphalt Roof Cement is ideal for sealing leaks and openings and provides a durable, watertight seal when waterproofing, repairing or sealing roofs. Commonly applied at flashing, copings, roof decks, roof vents and to repair loose shingles.

For use on: asphalt, vinyl, aluminum, concrete, stone, brick and cement

- Excellent adhesion and weatherproofing
- Long-lasting watertight seal
- Withstands temperature extremes
- Can be applied to wet surfaces

Meets ASTM D-4586, Type I, Class II.



PRODUCT	COLOR	SIZE
W43505010	Black	10.0 fl.oz.



STOP GAP!® MINIMAL & TRIPLE EXPANDING INSULATING FOAM

These products expand to take the shape of gaps and crevices forming an airtight and waterproof bond to most surfaces. Stop Gap! dries tack free in 30 minutes and cures in 8 hours. It can be trimmed, sanded and painted. Exposure to sunlight will cause discoloration. Exterior usage requires painting.

For use on: wood, metal, masonry, glass and most plastics

- Fills and insulates gaps and cracks
- Water resistant

PRODUCT	COLOR	SIZE
MINIMAL EXPANDING WL1111100	Tan	12.0 fl.oz.
TRIPLE EXPANDING* WL3333300	Tan	12.0 fl.oz.
TRIPLE EXPANDING* WL3333320	Tan	20.0 fl.oz.

*Triple expanding foam should not be used to seal openings around windows and doors.

FLAME BUSTER SILICONE SEALANT

This premium silicone sealant is designed to block the spread of smoke and fire. It forms a water-resistant seal that will also resist smoke and toxic gases, ultraviolet radiation and ozone.

For use on: copper and other metal through-penetrations

- Will withstand temperatures up to 300 °F
- Resists cracking
- Can be applied in temperatures ranging from -20 °F to 122 °F

Meets specifications ASTM E-814 (UL1479), UBC 7-5, meets ASTM E-1966 (UL2079), meets ASTM C-920, Class 25.

PRODUCT	COLOR	SIZE
W44117010	Red	10.0 fl.oz.



FBC™ System Compatible indicates that this product has been tested and is monitored on an ongoing basis, to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® piping systems and products made with TempRite® Technology. The FBC System Compatible Logo, FBCTM, FlowGuard Gold®, BlazeMaster®, Corzan® and TempRite® are trademarks of Lubrizol Advanced Materials, Inc. or its affiliates.



FLAME BUSTER INTUMESCENT LATEX CAULK

White Lightning Flame Buster Intumescent Latex Caulk is an elastomeric, intumescent sealant that expands when exposed to fire or extreme heat, forming an insulated char. Flame Buster Intumescent Latex Caulk will prevent the spread of toxic gases, smoke and fire. It is suitable for adhesion to almost any surface and remains flexible, making it ideal for both horizontal and vertical joints, subject to vibration or dynamic movement. Flame Buster Intumescent Latex Caulk can be used for interior or exterior applications and can be painted (after inspection).

For use on or around: wires, pipes, ducts and vents

- Expands to 5 times original volume (at 600 °F)
- Interior/exterior use
- Remains flexible
- VOC compliant
- Safe to handle
- Water cleanup

Meets ASTM E-814 (UL1479) and meets the criteria for fire/smoke/draft stop for CABO - UBC - SBCCI - IRC, IBC.

PRODUCT	COLOR	SIZE
W44007010	Red	10.0 fl.oz.
W44007020	Red	5 Gallon*



(after inspection)

1.800.241.5295 | wlcaulk.com



POLYURETHANE ONE-COMPONENT SEALANT - SMOOTH



This polyurethane one-component sealant is moisture cure, non-sag and gun grade. It is designed for a wide range of sealing applications in joints subject to structural movement. After curing, this sealant exhibits a flexible, resilient, rubber-like appearance that adheres to a wide variety of substrates and provides up to 70% total joint movement. It is especially effective between joints of dissimilar substrates. Commonly applied at window frames, doors, skylights, foundations, concrete driveways, expansion wall joints, fascia and siding.

For use on: concrete, cement, cementitious board, masonry, brick, stucco, wood, vinyl and aluminum

- Superior adhesion to many substrates
- Resists deterioration due to extreme weather, stress, movement, water and many chemicals
- Paintable after full cure
- Easy application
- CARB Compliant formulation

Meets or exceeds the test requirements of ASTM C-920, Class 35, Type S, Grade NS, Use-NT, A, M, G, O. Federal Specification TT-S-00230C, Type II, Class A, Non-sag, One Component, CGSB 19, GP-13.

PRODUCT	COLOR	SIZE
W42200010	White	10.1 fl.oz.
W42204110	Limestone	10.1 fl.oz.



MORTAR PATCH ACRYLIC LATEX CAULK



This water-cleanup formula provides a durable seal for repairing holes in concrete, mortar, cinder block, stucco, stone, limestone and brick. Commonly applied at driveways, sidewalks, patios, above-ground foundations and in various types of masonry.

For use on: concrete, stucco, mortar, masonry and brick

- Remains flexible
- Dries to a paintable finish
- Provides a watertight seal

PRODUCT	COLOR	SIZE
W42004010	Cement Gray	10.0 fl.oz.

ORANGE PEEL OIL-BASED WALL TEXTURE

White Lightning Orange Peel Oil-Based Wall Texture provides a quick and easy solution to matching original orange peel texture on walls with very minimal mess for seamless touch-up and repair. Dries in 5 minutes or less. Available in coarse and fine textures.

For use on: interior walls, drywall, plaster, wood and more

- Quick and easy spray
- Minimal prep and mess
- Dries in 5 minutes or less
- Paintable



PRODUCT	TEXTURE	SIZE
W5A001000	Coarse	20.0 fl.oz.
W5A001500	Fine	20.0 fl.oz.



ORANGE PEEL AND KNOCK DOWN WATER-BASED WALL TEXTURE

White Lightning Orange Peel and Knock Down Water-Based Wall Texture provide a quick and easy solution to matching original orange peel and knock down texture on walls with very minimal mess for seamless touch-up and repair. Dries in 30 minutes. Available in coarse and fine textures.

For use on: interior walls, drywall, plaster, wood and more

- Quick and easy spray
- Minimal prep and mess
- Dries in 30 minutes
- Paintable



ORANGE PEEL — Water based

PRODUCT	TEXTURE	SIZE
W5A002000	Coarse	20.0 fl.oz.
W5A002500	Fine	20.0 fl.oz.

KNOCK DOWN — Water based

PRODUCT	TEXTURE	SIZE
W5A003000	Coarse	20.0 fl.oz.
W5A003500	Fine	20.0 fl.oz.





1-STEP LIGHTWEIGHT SPACKLING COMPOUND

An interior patching product formulated not to shrink, even on large surface repairs. Ideal for filling holes and cracks in most common construction surfaces.

For use on: wallboard, plaster, drywall, wood, concrete and masonry

- Interior use only
- No shrinking or cracking
- Cured spackling compound is rust/mildew resistant
- Non-slump formula for smooth application
- Excellent filling capacity



PRODUCT	COLOR	SIZE
WL60512	White	1/2 pint
WL60520	White	Quart



PAINTER'S PUTTY

This pliable putty is ideal for sealing and filling cracks, small openings and holes in wood. It seals and repairs surfaces to create a finished, professional look. It is packed in water for extended shelf life.

For use on: all interior and exterior wood surfaces

- Fills imperfections quickly
- Resists cracking, sagging and shrinking
- Excellent adhesion
- Easy to knead
- Paintable



PRODUCT	COLOR	SIZE
WL08116	Tan	Quart

PART #	PRODUCT DESCRIPTION	COLOR	SIZE	CASE QTY	PRODUCT UPC	CASE PACK UPC	SCC	CASE WEIGHT (POUNDS)	CASE DIMENSIONS		
									H"	W"	L"
W1110010	SILICONE ULTRA All Purpose Sealant	White	10.0 fl. oz.	12	023275092129	N/A	30023275092120	12.50	11.50	8.00	6.00
W1111010	SILICONE ULTRA All Purpose Sealant	Clear	10.0 fl. oz.	12	023275090125	N/A	30023275090126	9.80	11.50	8.00	6.00
W11120010	SILICONE RUBBER All Purpose Sealant	White	10.0 fl. oz.	12	023275092105	N/A	30023275092106	10.00	11.50	8.00	6.00
W1112005	SILICONE RUBBER All Purpose Sealant	Clear	3.0 fl. oz.	12	023275090231	N/A	50023275090236	3.00	8.00	8.00	6.00
W11121010	SILICONE RUBBER All Purpose Sealant	Clear	10.0 fl. oz.	12	023275090101	N/A	30023275090102	9.88	11.50	8.00	6.00
W11124510	SILICONE RUBBER All Purpose Sealant	Aluminum	10.0 fl. oz.	12	023275093102	N/A	30023275093103	10.00	11.50	8.00	6.00
W11125010	SILICONE RUBBER All Purpose Sealant	Black	10.0 fl. oz.	12	023275094109	N/A	30023275094100	10.01	11.50	8.00	6.00
W11127010	SILICONE RUBBER All Purpose Sealant	High Heat Red	10.0 fl. oz.	12	023275196117	N/A	50023275196112	9.60	11.50	8.00	6.00
W11000005	3006 ULTRA® All Purpose Elastomeric Sealant	White	5.5 fl. oz.	12	023275524934	0-23275-00168-8	10023275524931	10.00	10.25	8.00	6.00
W11000010	3006 ULTRA All Purpose Elastomeric Sealant	White	10.0 fl. oz.	12	023275147614	0-23275-00072-8	30023275147615	9.45	11.50	8.00	6.00
W11001005	3006 ULTRA All Purpose Elastomeric Sealant	Clear	10.0 fl. oz.	12	023275524941	0-23275-00169-5	10023275524948	13.56	10.25	8.00	6.00
W11001010	3006 ULTRA All Purpose Elastomeric Sealant	Clear	10.0 fl. oz.	12	023275147621	0-23275-00096-4	30023275147622	13.20	11.50	8.00	6.00
W11002010	3006 ULTRA All Purpose Elastomeric Sealant	Almond	10.0 fl. oz.	12	023275030701	0-23275-00073-5	10023275030708	15.00	11.50	8.00	6.00
W11004010	3006 ULTRA All Purpose Elastomeric Sealant	Gray	10.0 fl. oz.	12	023275030688	0-23275-00074-2	10023275030685	10.00	11.50	8.00	6.00
W11005010	3006 ULTRA All Purpose Elastomeric Sealant	Black	10.0 fl. oz.	12	023275030695	0-23275-00075-9	10023275030692	13.56	11.50	8.00	6.00
W11006010	3006 ULTRA All Purpose Elastomeric Sealant	Cedar	10.0 fl. oz.	12	023275030718	0-23275-00097-1	10023275030715	13.56	11.50	8.00	6.00
W120D0010	3006 QUICK DRY™ Siliconized Acrylic Latex Caulk	White	10.0 fl. oz.	12	023275003552	0-23275-01355-1	10023275003559	14.57	11.50	8.00	6.00
W12AF0005	3006™ ALL PURPOSE Adhesive Caulk	White	5.5 fl. oz.	12	023275300668	0-23275-31066-7	30023275300669	7.60	10.25	8.00	6.00
W12AF0010	3006 ALL PURPOSE Adhesive Caulk	White	10.0 fl. oz.	12	023275300606	0-23275-30061-3	30023275300607	14.57	11.50	8.00	6.00
W12001010	3006 ALL PURPOSE Adhesive Caulk	Clear	10.0 fl. oz.	12	023275300675	N/A	30023275300676	9.82	11.50	8.00	6.00
W12001005	3006 ALL PURPOSE Adhesive Caulk	Clear	5.5 fl. oz.	12	023275310674	N/A	30023275310675	5.40	10.25	8.00	6.00
W12002010	3006 ALL PURPOSE Adhesive Caulk	Almond	10.0 fl. oz.	12	023275010109	N/A	30023275010100	14.40	11.50	8.00	6.00
W12003010	3006 ALL PURPOSE Adhesive Caulk	Brown	10.0 fl. oz.	12	023275008106	N/A	30023275008107	13.40	11.50	8.00	6.00
W12004010	3006 ALL PURPOSE Adhesive Caulk	Gray	10.0 fl. oz.	12	023275006102	N/A	30023275006103	14.15	11.50	8.00	6.00
W13000010	PAINTER'S PREFERRED® Acrylic Latex Caulk	White	10.0 fl. oz.	12	023275300101	0-23275-31010-0	30023275300102	13.92	11.50	8.00	6.00
WL0004002	EL SELLADOR Siliconized Acrylic Latex Adhesive Caulk	White	10.0 fl. oz.	12	023275851580	N/A	10023275851587	15	11.50	8.00	6.00

ALL PURPOSE

TECHNICAL ASSISTANCE

- Tech Data Sheets and Safety Data Sheets (SDS) - Can be downloaded from paintdocs.com
- Customer Service - Our team of White Lightning® professionals can answer any general or technical question regarding our products. White Lightning Customer Service: 1.800.241.5295



PRODUCT INFORMATION

PRODUCT INFORMATION

PART #	PRODUCT DESCRIPTION	COLOR	SIZE	CASE QTY	PRODUCT UPC	CASE PACK UPC	SCC	CASE WEIGHT (POUNDS)		CASE DIMENSIONS	
								H"	W"	H"	L"
PROMAX®											
W60300010	ProMAX 300 RCS-4® Acrylic Urethane Elastomeric Sealant	White	10.0 fl. oz.	12	023275003392	0-23275-01339-1	10023275003399	15.00	11.50	8.00	6.00
W60302010	ProMAX 300 RCS-4 Acrylic Urethane Elastomeric Sealant	Almond	10.0 fl. oz.	12	023275003378	0-23275-01337-7	10023275003375	15.00	11.50	8.00	6.00
W60303510	ProMAX 300 RCS-4 Acrylic Urethane Elastomeric Sealant	Bronze	10.0 fl. oz.	12	023275003385	0-23275-01338-4	10023275003382	15.00	11.50	8.00	6.00
KITCHEN BATH											
W21000005	LATEX ULTRA Premium High Gloss Sealant	White	5.5 fl. oz.	12	023275128620	0-23275-00086-5	30023275128621	6.54	10.25	8.00	6.00
W21000010	LATEX ULTRA Premium High Gloss Sealant	White	10.0 fl. oz.	12	023275128613	0-23275-00110-7	30023275128614	13.65	11.50	8.00	6.00
W21001010	LATEX ULTRA Premium High Gloss Sealant	Clear	10.0 fl. oz.	12	023275128637	0-23275-00084-1	30023275128638	9.78	11.50	8.00	6.00
W21100005	SILICONE ULTRA Kitchen & Bath Sealant	White	5.3 fl. oz.	12	023275921658	0-23275-12165-2	30023275921659	5.5	10.25	8.00	6.00
W21100010	SILICONE ULTRA Kitchen & Bath Sealant	White	10.0 fl. oz.	12	023275092167	0-23275-19216-4	30023275092168	12.5	11.50	8.00	6.00
W21101005	SILICONE ULTRA Kitchen & Bath Sealant	Clear	5.3 fl. oz.	12	023275901650	0-23275-10165-4	30023275901651	4.83	10.25	8.00	6.00
W21101010	SILICONE ULTRA Kitchen & Bath Sealant	Clear	10.0 fl. oz.	12	023275090163	0-23275-19016-0	30023275090164	12.5	11.50	8.00	6.00
W21102010	SILICONE ULTRA Kitchen & Bath Sealant	Almond	10.0 fl. oz.	12	023275098107	0-23275-19810-4	30023275098108	9.65	11.50	8.00	6.00
W22000005	TUB & TILE Siliconized Acrylic Latex Caulk	White	5.5 fl. oz.	12	023275505018	0-23275-50512-4	50023275505129	7.42	10.25	8.00	6.00
W22000010	TUB & TILE Siliconized Acrylic Latex Caulk	White	10.0 fl. oz.	12	023275025103	0-23275-12510-0	30023275025104	13.7	11.50	8.00	6.00
WINDOW DOOR											
W31100010	SILICONE ULTRA Window & Door Sealant	White	10.0 fl. oz.	12	023275092150	0-23275-19215-7	30023275092151	9.20	11.50	8.00	6.00
W31101010	SILICONE ULTRA Window & Door Sealant	Clear	10.0 fl. oz.	12	023275090156	0-23275-19015-3	30023275090157	9.20	11.50	8.00	6.00
W31103510	SILICONE ULTRA Window & Door Sealant	Bronze	10.0 fl. oz.	12	023275009813	0-23275-01981-2	10023275009810	11.23	11.50	8.00	6.00
W31104510	SILICONE ULTRA Window & Door Sealant	Aluminum	10.0 fl. oz.	12	023275009912	0-23275-01991-1	10023275009919	11.23	11.50	8.00	6.00
W31100010	SILICONE RUBBER Window & Door Sealant	White	10.0 fl. oz.	12	023275092174	0-23275-19217-1	30023275092175	8.90	11.50	8.00	6.00
W31111010	SILICONE RUBBER Window & Door Sealant	Clear	10.0 fl. oz.	12	023275090170	0-23275-19017-7	30023275090171	8.90	11.50	8.00	6.00
W32000010	WEATHER SEAL Siliconized Acrylic Latex Caulk	White	10.0 fl. oz.	12	023275306004	0-23275-31600-3	30023275306005	14.30	11.50	8.00	6.00
WL08012	WINDOW & DOOR Siliconized Acrylic Latex Glazing Compound	White	10.0 fl. oz.	12	023275140721	N/A	30023275080127	16.02	11.50	8.00	6.00

PART #	PRODUCT DESCRIPTION	COLOR	SIZE	CASE QTY	PRODUCT UPC	CASE PACK UPC	SCC	CASE WEIGHT (POUNDS)		CASE DIMENSIONS	
								H"	W"	H"	L"
SPECIALTY											
W31200010	OPTIMA Premium Hybrid Sealant	White	9.0 fl. oz.	12	023275004191	0-23275-01419-0	10023275004198	13.0	11.50	8.00	6.00
W31201010	OPTIMA Premium Hybrid Sealant	Crystal Clear	9.0 fl. oz.	12	023275004207	0-23275-01420-6	10023275004204	9.0	11.50	8.00	6.00
W30000010	PRISTINE® Premium Acrylic Sealant	White	10 fl. oz.	12	023275004214	N/A	10023275004211	14.5	11.50	8.00	6.00
W13300010	MEGALASTIC® Super Elastic Sealant	White	10.0 fl. oz.	12	023275045064	0-23275-00098-8	10023275045061	12.20	11.50	8.00	6.00
W31010010	BOLT® QUICK DRY Siliconized Acrylic Latex Caulk	White	10.0 fl. oz.	12	023275205109	N/A	30023275205100	13.37	11.50	8.00	6.00
W31202210	PAINTABLE SILICONE All Purpose Hybrid Sealant	White	9.0 fl. oz.	12	023275990173	0-23275-00076-6	10023275000626	12.00	11.50	8.00	6.00
W70100010	SPEED GRIP® Construction Adhesive	White	9.0 fl. oz.	12	023275003187	N/A	10023275003184	12.50	11.50	8.00	6.00
WL0980016	CARPET & FLOOR Adhesive	Tan	1 GALLON	12	023275098008	N/A	30023275098009	39.20	15.50	8.30	16.00
W41000010	STORM BLASTER® All Weather Construction Sealant	White	10.0 fl. oz.	12	023275775152	0-23275-77615-9	10023275003214	11.20	11.50	8.00	6.00
W41401010	STORM BLASTER All Weather Construction Sealant	Clear	10.0 fl. oz.	12	023275770102	N/A	10023275770109	7.70	11.50	8.00	6.00
W41401005	STORM BLASTER All Weather Construction Sealant	Clear	5 fl. oz.	12	023275003798	N/A	10023275003795	5.5	10.25	8.00	6.00
W41501010	SEASONS Seal Removable Weather Stripping	Clear	10.0 fl. oz.	12	023275095953	0-23275-19595-0	30023275095954	8.40	11.50	8.00	6.00
WL1111100	STOP GAP!® Minimal Expanding Insulating Foam	Tan	12.0 fl. oz.	12	023275111110	N/A	30023275111111	8.11	0	0	0
WL3333300	STOP GAP! Triple Expanding Insulating Foam	Tan	12.0 fl. oz.	12	023275333338	N/A	30023275333339	8.10	0	0	0
WL3333320	STOP GAP! Triple Expanding Insulating Foam	Tan	20.0 fl. oz.	12	023275333208	N/A	30023275333209	20.40	12.50	8.80	11.5
W43101010	SILICONE ULTRA Gutter & Flashing Sealant	Clear	10.0 fl. oz.	12	023275001176	0-23275-01117-5	10023275001173	12.48	11.75	6.00	8.25
W43400010	BUTYL RUBBER Caulk	White	10.0 fl. oz.	12	023275001145	0-23275-01114-4	30023275001146	12.90	11.50	8.00	6.00
W43505010	ASPHALT ROOF CEMENT Sealant	Black	10.0 fl. oz.	12	023275002159	N/A	20023275002153	10.75	11.50	8.00	6.00
W44007010	FLAME BUSTER® Intumescent Latex Caulk	Red	10.0 fl. oz.	12	023275850156	N/A	10023275850153	12.45	11.50	8.00	6.00
W44007020	FLAME BUSTER Intumescent Latex Caulk (Made to Order)	Red	5 GALLON	12	023275851719	N/A	10023275851716	55.80	14.50	12.00	12.00
W44017010	FLAME BUSTER High Heat & Smoke Blocking Latex Caulk	Red	10.0 fl. oz.	12	023275880306	0-23275-18030-7	30023275880307	16.56	11.50	8.00	6.00
W44107010	FLAME BUSTER Intumescent Silicone Sealant	Red	10.0 fl. oz.	12	023275880108	0-23275-18010-9	30023275880109	11.28	11.50	8.00	6.00
W44117010	FLAME BUSTER Silicone Sealant	Red	10.0 fl. oz.	12	023275880207	N/A	30023275880208	11.88	11.50	8.00	6.00
W42004010	MORTAR PATCH Acrylic Latex Caulk	Gray	10.0 fl. oz.	12	023275701120	N/A	30023275701121	14.6	11.50	8.00	6.00
W42200010	POLYURETHANE One-Component Sealant - Smooth	White	10.1 fl. oz.	12	023275290518	N/A	10023275290515	10.68	11.75	6.00	8.25
W42204110	POLYURETHANE One-Component Sealant - Smooth	Limestone	10.1 fl. oz.	12	023275290525	N/A	10023275290522	10.68	11.75	6.00	8.25
PATCH & REPAIR											
W5A001000	ORANGE PEEL Oil-Based Wall Texture - Coarse	White	20 oz.	6	023275003538	N/A	10023275003535	9.04	10.12	5.80	8.43
W5A001500	ORANGE PEEL Oil-Based Wall Texture - Fine	White	20 oz.	6	023275003545	N/A	10023275003542	9.04	10.12	5.80	8.43
W5A002000	ORANGE PEEL Water-Based Wall Texture - Coarse	White	20 oz.	6	023275003736	N/A	10023275003733	10	10.12	5.80	8.43
W5A002500	ORANGE PEEL Water-Based Wall Texture - Fine	White	20 oz.	6	023275003743	N/A	10023275003740	9.81	10.12	5.80	8.43
W5A003000	KNOCK DOWN Water-Based Wall Texture - Coarse	White	20 oz.	6	023275003750	N/A	10023275003757	10	10.12	5.80	8.43
W5A003500	KNOCK DOWN Water-Based Wall Texture - Fine	White	20 oz.	6	023275003767	N/A	10023275003764	9.81	10.12	5.80	8.43
WL60512	1-STEP LIGHTWEIGHT Spackling Compound	White	1/2 PINT	12	023275605152	N/A	30023275605122	3.97	4.62	11.00	13.81
WL60520	1-STEP LIGHTWEIGHT Spackling Compound	White	QUART TUB	6	023275605206	N/A	20023275605200	7.53	5.62	8.90	13.06
WL08116	PAINTER'S PUTTY	Tan	QUART TUB	6	023275081161	N/A	50023275081166	25.5	12.87	5.00	8.50



White Lightning® Products

Cleveland, Ohio 44115 / 1.800.241.5295 / wlcaulk.com